



**CMO VALVES**  
manufacturing the valve you need

# 33A SERIES



## FABRICATION RANGE *DUAL PLATE CHECK VALVE*

### UTILIZATION:

- Dual plate check valves, reduced size and high performance valves, suitable for use in fire prevention, air conditioning facilities, irrigation and water supplying.
- It is 100% water tight.

# 33 - SERIES

## DUAL PLATE CHECK VALVES



### MAIN FEATURES:


- 100% water tight.
- Stainless steel axis and springs.
- Max. working pressure 16 bar.
- Working temperature between -10°C and 90°C.

### STANDARDS APPLIED:

- Hydrostatic tests according to EN 12266-1, class A.
- EC Directive.
- Distance between flanges according to EN 558-2 series 16.

### DIMENSIONS

DN	A	B	C	D	E	L	Weight
40	92	65	49	48	59	43	0,8
50	107	65	49	48	59	43	1,3
65	127	80	63	60	78	46	1,6
80	142	94	69	70	91	64	2,8
100	162	117	97	88	110	64	4,0
125	192	145	121	115	142	70	5,5
150	218	170	145	134	170	76	8,0
200	273	224	197	182	222	89	13,5
250	328	265	234	223	264	114	24,4
300	378	310	284	260	310	114	33,0
350	438	360	333	300	360	127	46,3
400	489	410	379	355	414	140	62,0
450	539	450	415	382	450	152	100,0
500	594	505	472	435	505	152	107,0
600	695	624	579	536	605	178	158,0

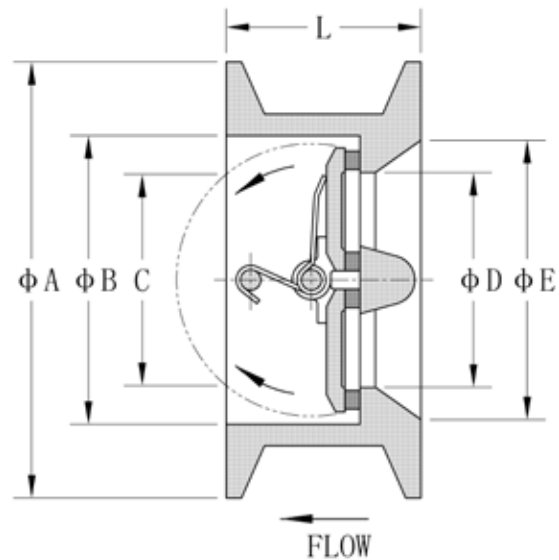

### DESCRIPTION

BODY	GJL250
PLATES	GJS500 / CF8M
GASKET	NBR
AXIS	AISI 410
PAINTING RAL 5015	Epoxy 250 µm

The images and drawings are non contractual.  
The specifications of the shown products could vary without previous notice.